

DH 3-12x50 DH 5-20x56

Day Rifle Scope



Applications

- Hunting

Features


- Multi-layer blooming of glass surfaces
- Absence of distortion of space for all magnifications
- Optimum image contrast
- Wide field of view
- Wide range of adjustment
- Precision mechanism of corrections
- Adjustable brightness of the reticle type Mil-Dot (TMR)
- Electronic control of reticle level
- Shockproof with heavy recoil (.50)
- Waterproof



Joint-Stock Company Dedal-NV
18, Stromynka str., Moscow, 107076, Russia
Tel: +7 (495) 617-0597 • Tel/Fax: +7 (495) 617-0596 • +7 (495) 961-2749
info@nightvision.ru • www.nightvision.ru

Day Rifle Scope

DH 3-12x50 DH 5-20x56

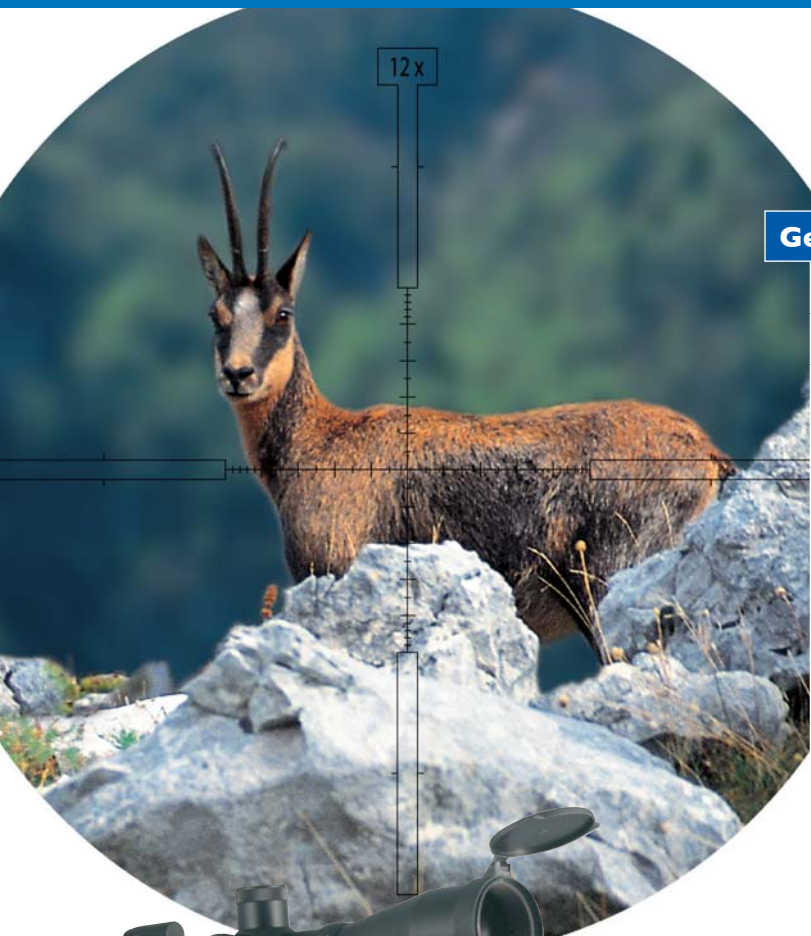

Technical specifications

DH 3-12x50


DH 5-20x56

General


Magnification (variable), x	3-12	5-20
Effective objective lens	50mm	56mm
Field of view, degree	6.8-1.7	4.0-0.9
Diopter setting, D	+3, -3	
Eye relief distance, mm	100	
Tactical windage/ Elevation adjustment per click	10mm/100m	
Max. adjustment height	3.4m/100m	3.3m/100m
Max. lateral adjustment	1.2m/100m	1.8m/100m
Range of working temperatures, °C	-40 to +50	
Relative humidity, %	up to 98%	
Dimensions, mm	347x77x77	386x85x83
Weight (without mount), kg	0.78	0.86




Electronic Level Control



Correct level
static red colour



No correct level
slow red flash



More incorrect level
fast red flash

NIGHT VISION
Dedal-NV